


# Loft V


DESIGN ANDREA CROSETTA



Kcal = Watt x 0.860  
BTU = Watt x 3.413


Watt  $\Delta t$  60° = Watt  $\Delta t$  50° x 1.283  
Watt  $\Delta t$  40° = Watt  $\Delta t$  50° x 0.737  
Watt  $\Delta t$  30° = Watt  $\Delta t$  50° x 0.497  
Watt  $\Delta t$  20° = Watt  $\Delta t$  50° x 0.285

p max = 6.5 bar

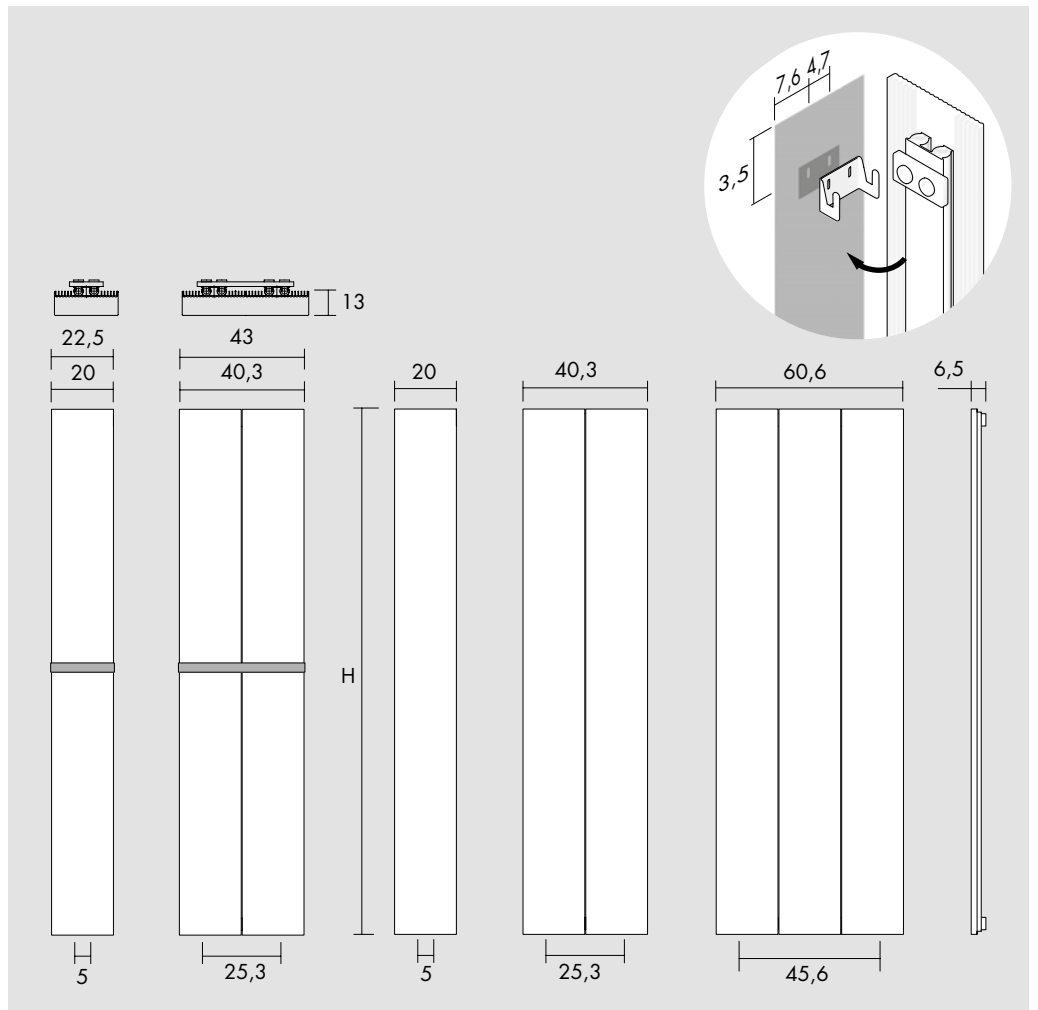


## [F]

Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar

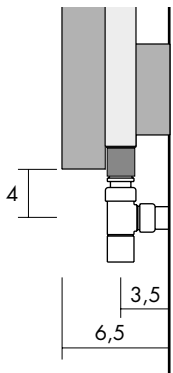

## [H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

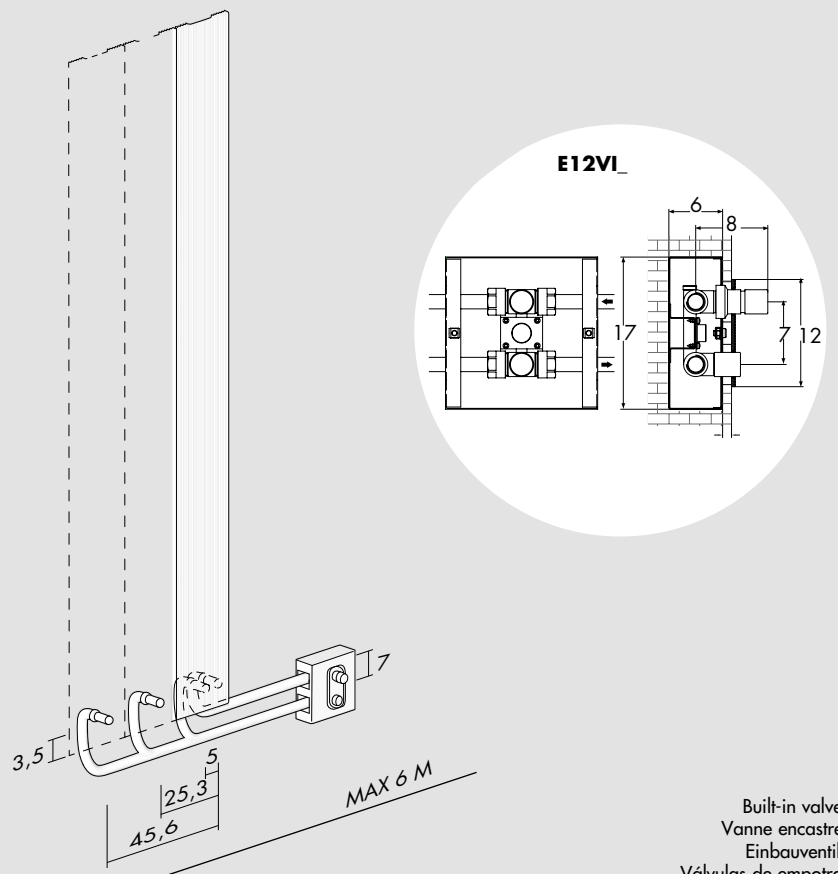

Built-in valves  
Vanne encastrer  
Einbauventile  
Válvulas de empotrar

## Loft V

H cm	L cm	I* cm	art*	Lt*	watt $\Delta t$ 30°	watt $\Delta t$ 50°
150.0	20.0	5.0	<b>LFV150001_</b>	1.1	167	<b>336</b>
150.0	40.3	25.3	<b>LFV150002_</b>	2.2	334	<b>672</b>
150.0	60.6	45.6	<b>LFV150003_</b>	3.4	501	<b>1 008</b>
170.0	20.0	5.0	<b>LFV170001_</b>	1.2	185	<b>373</b>
170.0	40.3	25.3	<b>LFV170002_</b>	2.5	371	<b>746</b>
170.0	60.6	45.6	<b>LFV170003_</b>	3.8	557	<b>1 120</b>
200.0	20.0	5.0	<b>LFV200001_</b>	1.4	218	<b>439</b>
200.0	40.3	25.3	<b>LFV200002_</b>	2.9	436	<b>878</b>
200.0	60.6	45.6	<b>LFV200003_</b>	4.3	655	<b>1 317</b>

## Loft V Aluc

Aluminium radiator in polished  
 Radiateur en aluminium poli  
 Heizkörper aus poliertem Aluminium  
 Radiador en aluminio pulido

H cm	L cm	I* cm	art*	Lt*	watt $\Delta t$ 30°	watt $\Delta t$ 50°
150.0	20.0	5.0	<b>LFV150001_</b>	1.1	108	<b>218</b>
150.0	40.3	25.3	<b>LFV150002_</b>	2.2	215	<b>433</b>
150.0	60.6	45.6	<b>LFV150003_</b>	3.4	326	<b>655</b>
170.0	20.0	5.0	<b>LFV170001_</b>	1.2	121	<b>243</b>
170.0	40.3	25.3	<b>LFV170002_</b>	2.5	241	<b>485</b>
170.0	60.6	45.6	<b>LFV170003_</b>	3.8	362	<b>728</b>
200.0	20.0	5.0	<b>LFV200001_</b>	1.4	142	<b>285</b>
200.0	40.3	25.3	<b>LFV200002_</b>	2.9	284	<b>571</b>
200.0	60.6	45.6	<b>LFV200003_</b>	4.3	425	<b>856</b>



## Optional



Reverse Valve  
 Vanne reverse  
 Reverse Ventil  
 Válvula a escuadra inversa

[BIAN] **E12RVB**  
 [CROM] **E12RVB**




Built-in valves  
 Vanne encastrer  
 Einbauventile  
 Válvulas de empotrar

[BIAN] **E12VIB**  
 [CROM] **E12VIR**




Thermostatic head  
 Tête thermostatique  
 Thermostatkopf  
 Cabezal termostático

[BIAN] **VTTB**  
 [CROM] **VTTR**



Sleeving kit  
 Kit couvre tuyau  
 Rosetten  
 Kit cubre tubo

[BIAN] **C5B**  
 [CROM] **C5R**



$\varnothing \leq 16$  mm  
 [BIAN] **CTB**  
 [CROM] **CTR**

$16 \text{ mm} < \varnothing < 24$  mm  
 [BIAN] **CWB**  
 [CROM] **CWR**



Towel bar  
 Porte-serviettes  
 Handtuchhalter  
 Porta toallas


22 cm  
 [CROM] **ML22R**  
 [COLOUR] **ML22C**  
 [GOLD] **ML22G**

42 cm  
 [CROM] **ML42R**  
 [COLOUR] **ML42C**  
 [GOLD] **ML42G**

art\* = item / modèle / Artikel / artículo    I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
 Lt\* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento  
 P\* = page / page / Seite / página

# Loft O


DESIGN ANDREA CROSETTA



Kcal = Watt x 0.860  
BTU = Watt x 3.413


Watt  $\Delta t$  60° = Watt  $\Delta t$  50° x 1.283  
Watt  $\Delta t$  40° = Watt  $\Delta t$  50° x 0.737  
Watt  $\Delta t$  30° = Watt  $\Delta t$  50° x 0.497  
Watt  $\Delta t$  20° = Watt  $\Delta t$  50° x 0.285

p max = 6.5 bar

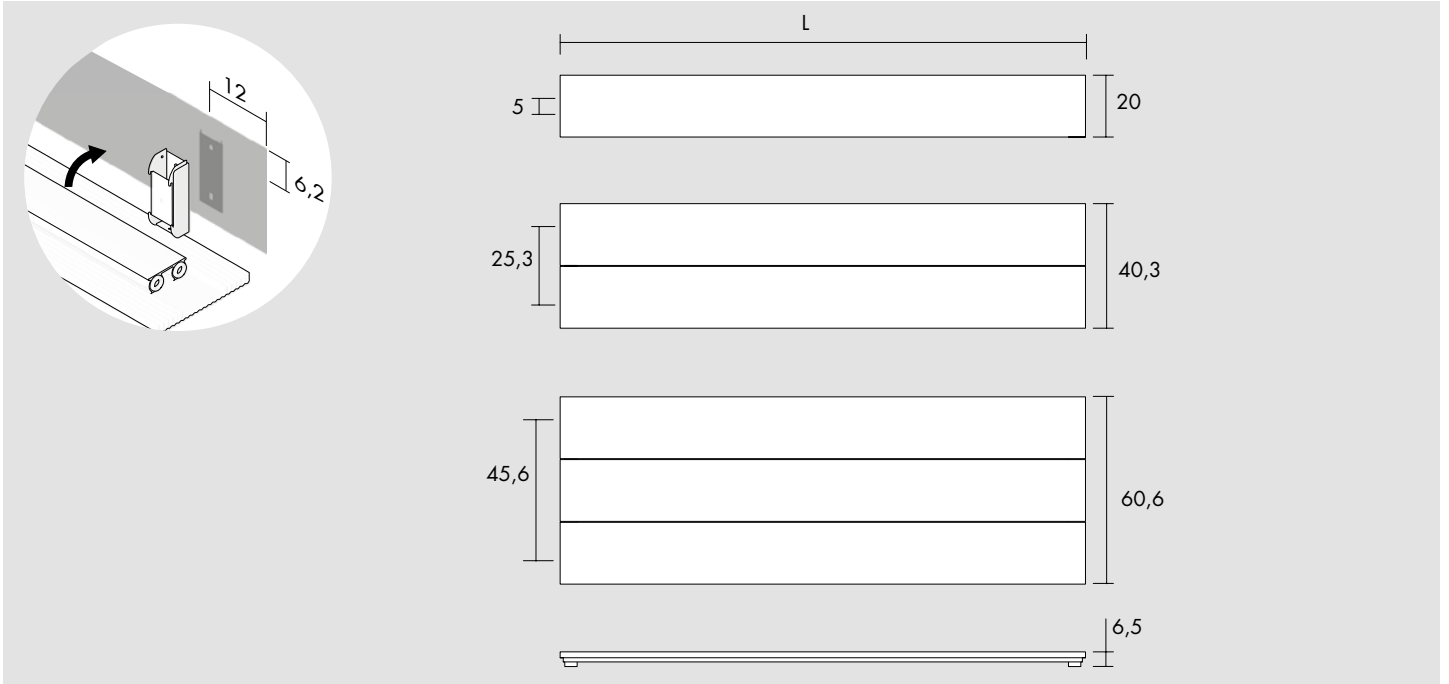


## [F]

Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar

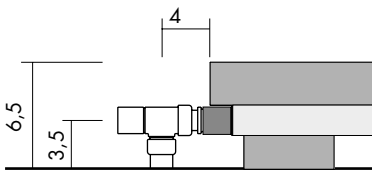

## [H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

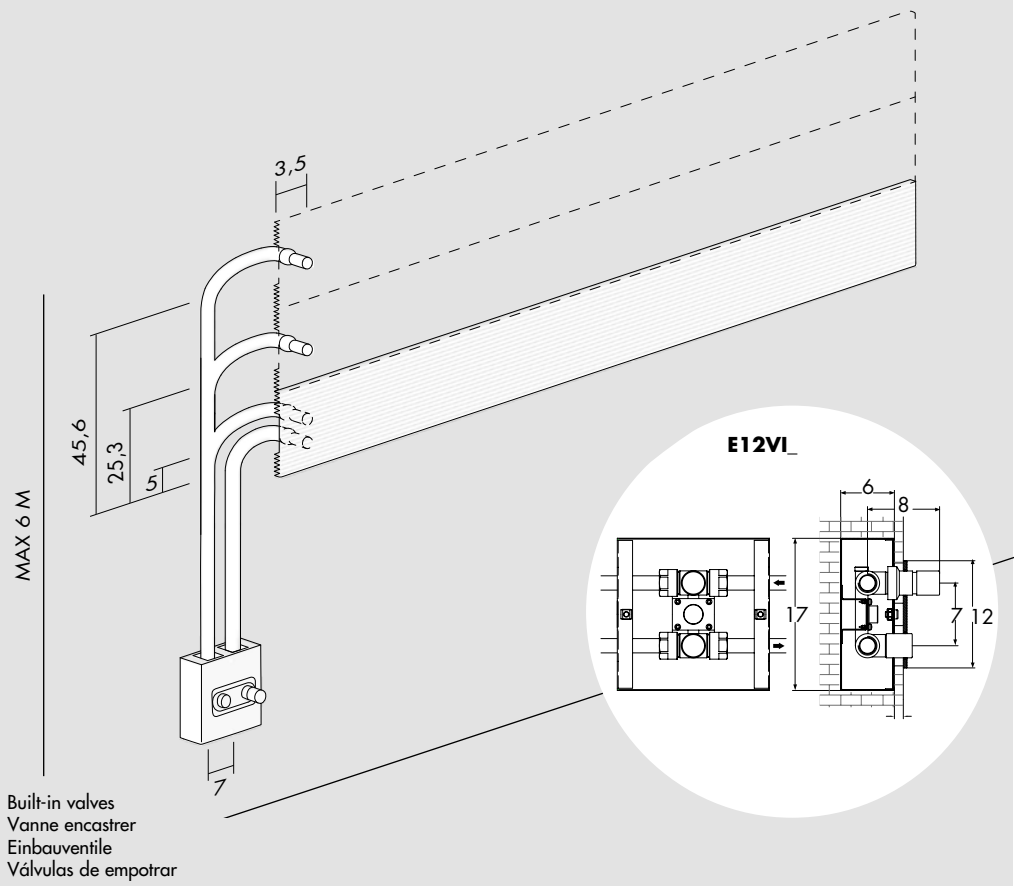

## Loft O

H cm	L cm	I* cm	art*	Lt*	watt $\Delta t$ 30°	watt $\Delta t$ 50°
20.0	150.0	5.0	<b>LFO150001_</b>	1.1	167	<b>336</b>
40.3	150.0	25.3	<b>LFO150002_</b>	2.2	334	<b>672</b>
60.6	150.0	45.6	<b>LFO150003_</b>	3.4	501	<b>1 008</b>
20.0	170.0	5.0	<b>LFO170001_</b>	1.2	185	<b>373</b>
40.3	170.0	25.3	<b>LFO170002_</b>	2.5	371	<b>746</b>
60.6	170.0	45.6	<b>LFO170003_</b>	3.8	557	<b>1 120</b>
20.0	200.0	5.0	<b>LFO200001_</b>	1.4	218	<b>439</b>
40.3	200.0	25.3	<b>LFO200002_</b>	2.9	436	<b>878</b>
60.6	200.0	45.6	<b>LFO200003_</b>	4.3	655	<b>1 317</b>

## Loft O Aluc

Aluminium radiator in polished  
 Radiateur en aluminium poli  
 Heizkörper aus poliertem Aluminium  
 Radiador en aluminio pulido




H cm	L cm	I* cm	art*	Lt*	watt $\Delta t$ 30°	watt $\Delta t$ 50°
20.0	150.0	5.0	<b>LFO150001_</b>	1.1	108	<b>218</b>
40.3	150.0	25.3	<b>LFO150002_</b>	2.2	215	<b>433</b>
60.6	150.0	45.6	<b>LFO150003_</b>	3.4	326	<b>655</b>
20.0	170.0	5.0	<b>LFO170001_</b>	1.2	121	<b>243</b>
40.3	170.0	25.3	<b>LFO170002_</b>	2.5	241	<b>485</b>
60.6	170.0	45.6	<b>LFO170003_</b>	3.8	362	<b>728</b>
20.0	200.0	5.0	<b>LFO200001_</b>	1.4	142	<b>285</b>
40.3	200.0	25.3	<b>LFO200002_</b>	2.9	284	<b>571</b>
60.6	200.0	45.6	<b>LFO200003_</b>	4.3	425	<b>856</b>

## Optional



Reverse Valve  
 Vanne reverse  
 Reverse Ventil  
 Válvula a escuadra inversa

[BIAN] **E12RVB**  
 [CROM] **E12RVB**




Built-in valves  
 Vanne encastrer  
 Einbauventil  
 Válvulas de empotrar

[BIAN] **E12VIB**  
 [CROM] **E12VIR**




Thermostatic head  
 Tête thermostatique  
 Thermostatkopf  
 Cabezal termostático

[BIAN] **VTTB**  
 [CROM] **VTRR**



Sleeving kit  
 Kit couvre tuyau  
 Rosetten  
 Kit cubre tubo


[BIAN] **C5B**  
 [CROM] **C5R**



$\varnothing \leq 16$  mm  
 [BIAN] **CTB**  
 [CROM] **CTR**

$16 \text{ mm} < \varnothing < 24$  mm  
 [BIAN] **CWB**  
 [CROM] **CWR**

**art\*** = item / modèle / Artikel / artículo    **I\*** = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
**Lt\*** = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento  
**P\*** = page / page / Seite / página

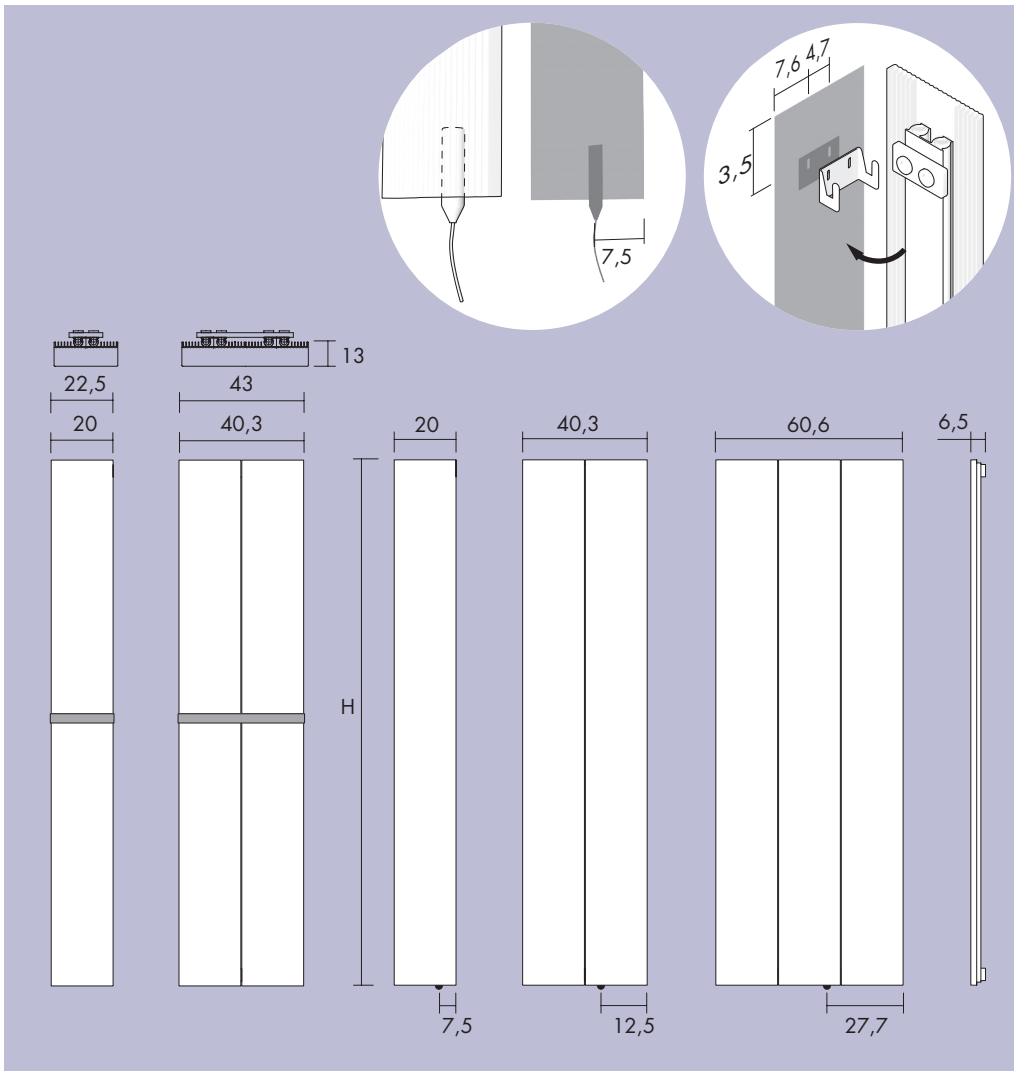

H cm	L cm	art*	watt	watt	ALUC [ L ]
150.0	20.0	EC Lfv150001_	200	200	
150.0	40.3	EC Lfv150002_	500	300	
150.0	60.6	EC Lfv150003_	700	500	
170.0	20.0	EC Lfv170001_	250	250	
170.0	40.3	EC Lfv170002_	600	300	
170.0	60.6	EC Lfv170003_	700	500	
200.0	20.0	EC Lfv200001_	300	200	
200.0	40.3	EC Lfv200002_	700	400	
200.0	60.6	EC Lfv200003_	900	700	

### Optional



Receiver  
Récepteur  
Empfänger  
Receptor

**R10**



Digital chronothermostat  
Chronothermostat digital  
Der digital Chronothermostat  
Cronotermostato digital

**T10**



Towel bar  
Porte-serviettes  
Handtuchhalter  
Porta toallas

22 cm  
[CROM] **ML22R**  
[COLOUR] **ML22C**  
[GOLD] **ML22G**  
42 cm  
[CROM] **ML42R**  
[COLOUR] **ML42C**  
[GOLD] **ML42G**